

32" Channel Drain Anti-Entrapment Suction Outlet Cover and Frame


VGB Series

The AquaStar line of suction outlet covers, compliant with the new Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 AND NSF 50-2008)

Features

- Requires a minimum 3" sump depth the entire length of cover
- For single or multiple drain use see installation instructions)
- Single - 3" sump depth
Floor: 236 GPM at 3.4 fps
Wall: 136 GPM at 1.9 fps
- Floor/wall: 106 GPM at 1.5 fps
- 22.6 square inch opening
- #316 stainless steel screws
- Manufactured from superior UV-resistant engineered polymers
- All components meet or exceed ANSI/APSP 16-2011 AND NSF 50-2008 national standards and ASTM G154 UV testing exposure
- Includes disposable "dogbone" supports to retain shape during all phases of construction
- Listed with IAPMO R&T
- 12 per case



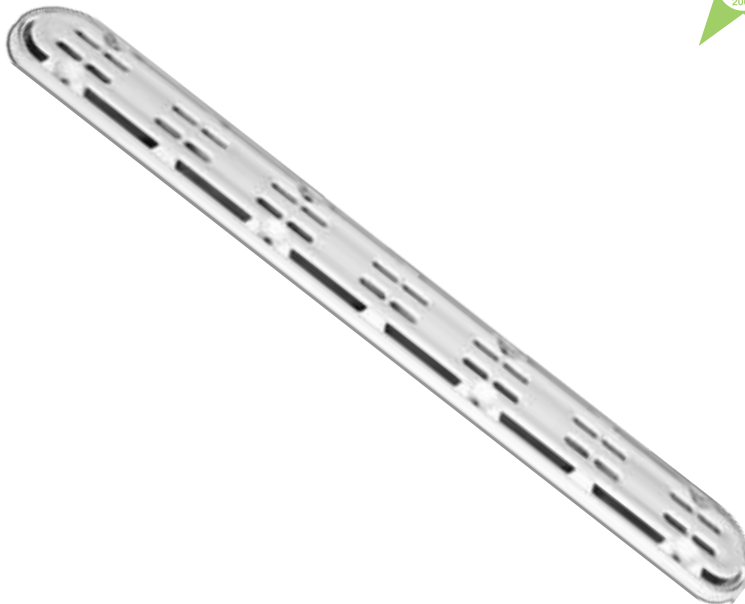


The Unblockable![™]






For field-fabricated sump (concrete pools)
Part # 32CDAVFRxxx

Two drains in one!

STANDARD COLORS




- | | |
|---|---|
|  101 |  105 |
|  102 |  108 |
|  103 | |

OPTIONAL COLORS

- | | |
|---|---|
|  104 |  107 |
|  106 | |

Also available cover only without sump/frame p/n 32CDAVNFxxx
40 per case

VGB 2008 Compliant



1. 32" channel drain, no sump, frame
2. 32" anti-entrapment suction outlet cover
3. 32" channel drain, frame support "dog bones", qty 4
4. #10 x 3/4" flat head phillips type-a screw, 316 ss, qty 16