

32" Channel Drain Anti-Entrapment Suction Outlet Cover and Frame

VGB Series

The AquaStar line of suction outlet covers, compliant with the new Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 AND NSF 50-2008)

Features

For single or multiple drain use (see installation instructions for plumbing, hydrostatic valve/drain pipe and single or multi-pump connections)

Single

Floor: 236 GPM at 3.4 fps

Wall: 136 GPM at 1.9 fps

Floor/wall: 106 GPM at 1.5 fps

22.6 square inch opening

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Three ports: bottom 2½" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

All components meet or exceed ANSI/APSP 16-2011 AND NSF 50-2008 national standards and ASTM G154 UV testing exposure

Orange disposable plastic pre-gunite/plaster insert keeps debris out and retains sump shape during construction

Must use transitional glue when attaching to PVC pipe

Listed with IAPMO R&T

4 per case

The Unblockable![™]



With sump (concrete pools)
Part # 32CDVxxx

Two drains in one!

STANDARD COLORS

101 105

102 108

103



OPTIONAL COLORS

104 107

106

Also available as sump only
p/n 32CDSBxxx 4 per case

VGB 2008 Compliant

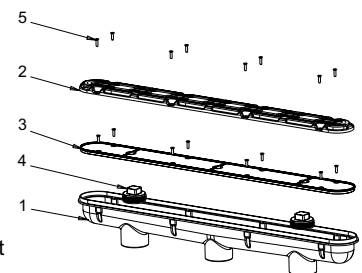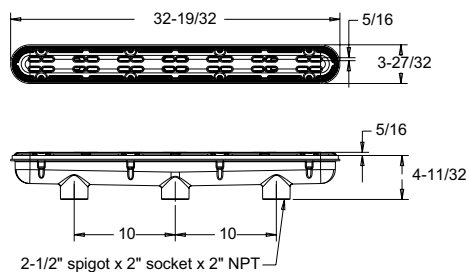

1. 32" three-port manufactured sump bucket
2. 32" anti-entrapment suction outlet cover
3. 32" channel drain, plaster shield
4. 2" NPT plug, qty 2
5. #10 x 3/4" flat head phillips type-a screw, 316 ss, qty 16