

# 32" Channel Drain Flat Grate Anti-Entrapment Suction Outlet Cover and Three-Port Manufactured Sump

## VGB Series

The AquaStar line of suction outlet covers, compliant with the new Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 And NSF 50-2008)

### Features

For single or multiple drain use (see installation instructions for plumbing, hydrostatic valve/drain pipe and single or multi-pump connections)

#### Single

Floor: 316 GPM at 3.9 fps

Wall: 208 GPM at 2.6 fps

Floor/wall: 122 GPM at 1.5 fps

25.9 square inch opening

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Three ports: bottom 2½" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

All components meet or exceed ANSI/APSP 16-2011 AND NSF 50-2008 national standards and ASTM G154 UV testing exposure


Orange disposable plastic pre-gunite/plaster insert keeps debris out and retains sump shape during construction

Must use transitional glue when attaching to PVC pipe

Listed with IAPMO R&T

4 per case


## The Unblockable!™

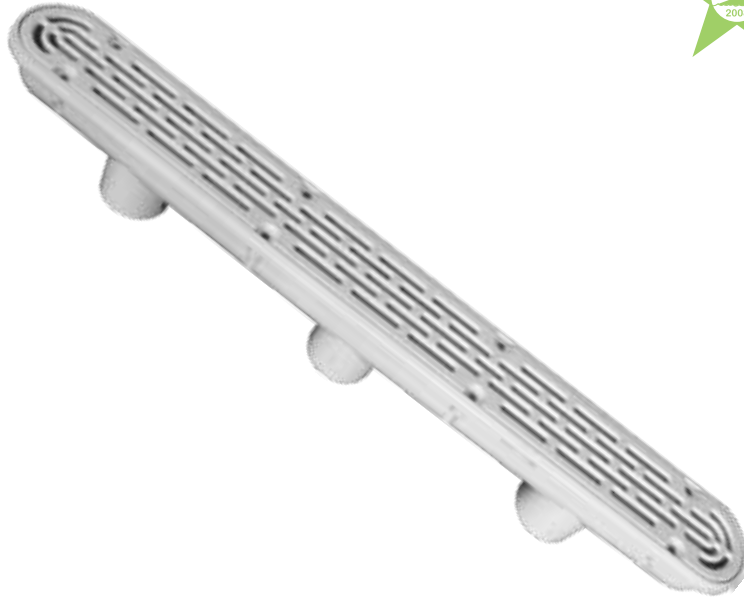


With sump (concrete pools)  
Part # 32CDFLxxx

## Two drains in one!

### STANDARD COLORS





### OPTIONAL COLORS




Also available as sump only  
p/n 32CDSBxxx 4 per case

## VGB 2008 Compliant



2-1/2" spigot x 2" socket x 2" NPT



1. 32" three-port manufactured sump bucket
2. 32" channel drain, cover, flat
3. 2" NPT plug, qty 2
4. 32" channel drain, plaster shield
5. #10 x 3/4" flat head phillips type-a screw, 316 ss, qty 16